


REV.	DESCRIPTION	DATE
A		08-2012

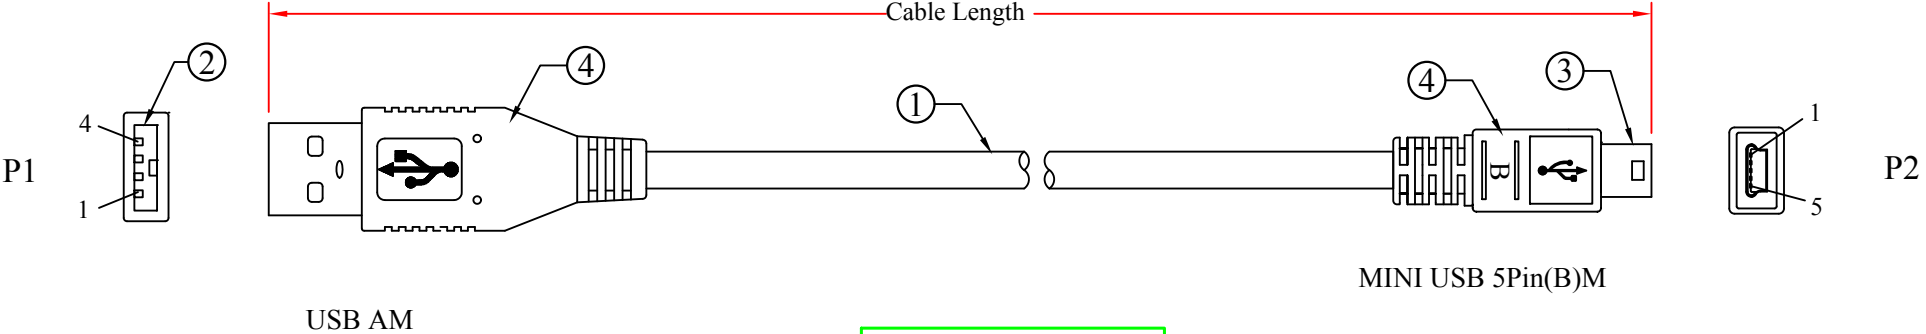

RoHS

Pin Assignment		
P1		P2
1	Red	1
2	Green	2
3	White	3
4	Black	5
Shell	Braid	Shell

NOTES:
 1. Electrical Test:
 (1) 100% Open Short & Miswire Test.
 (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH
10UM-02101BK	1 FT
10UM-02101.5BK	1.5 FT
10UM-02103BK	3 FT
10UM-02106BK	6 FT
10UM-02110BK	10 FT
10UM-02115BK	15 FT

4	Black Molded PVC
3	MINI USB 5Pin B Type Male ,Contact:Gold Flash,Shell: Nickel Plated
2	USB A Type Male ,Insulation White,Contact:Gold Flash,Shell: Nickel Plated
1	USB 2.0 Cable UL2725 28AWG(7/0.127 TC)*1P (Green & White) + 28AWG(7/0.127 TC)*2C (Black & Red) + AL-Foil + Braid(16/5/0.12ALMG), OD: 3.8mm, Black PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10UM-021xxBK			DRAWER	JL
TITLE	USB Type A Male / Mini-B Male Cable 5 Pin, Black			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	INCH		
DRAWING NO:				 888-212-8295.com CableWholesale.com	