


REV.	DESCRIPTION	DATE
A		11-2014

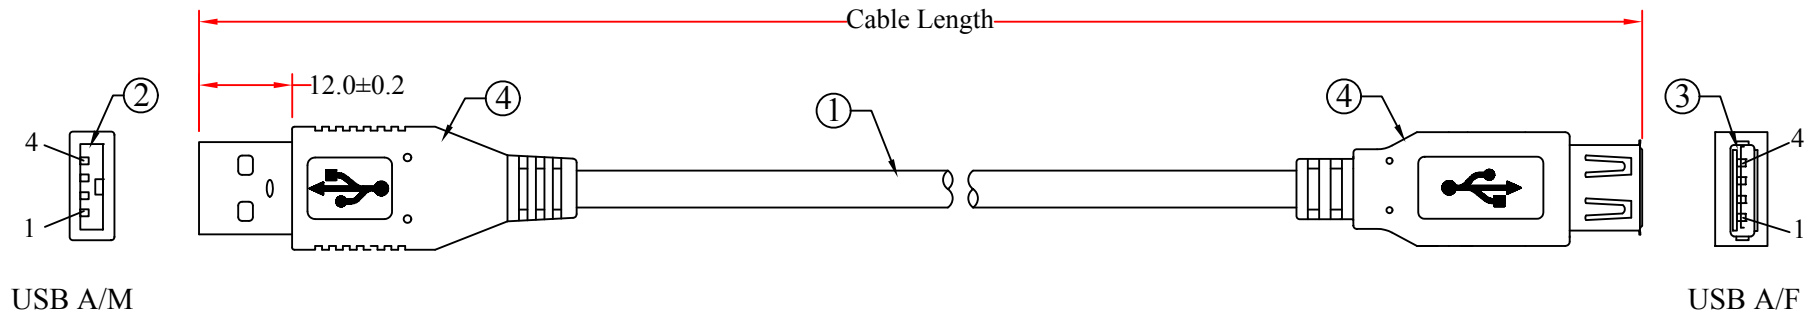

RoHS

Pin Assignment		
USB AM		USB AF
1	Red	1
2	Green	2
3	White	3
4	Black	4
Shell	Drain+Braid	Shell

NOTES:

- 1.Electrical Test:
- (1)100% Open Short & Miswire Test.
- (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH
10U2-02101EBK	1 FT
10U2-02103EBK	3 FT
10U2-02106EBK	6 FT
10U2-02110EBK	10 FT
10U2-02115EBK	15 FT

4	Black Molded PVC
3	USB A Type Female ,Contact:Gold Flash, Shell: Nickel Plated, Insulation White
2	USB A Type Male ,Contact:Gold Flash, Shell: Nickel Plated, Insulation White
1	USB 2.0 Cable UL2725 28AWG TC*1P (Green & White) + 24AWG TC*2C (Black & Red) + Drain + AL-Mylar + Braid 16/5/0.12mm ALMG , OD: 4.5mm, Black Outer PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10U2-021xxEBK		DRAWER	JL
TITLE	USB Type A Male / Type A Female Cable 2.0 Version		CHECKED	
MATERIAL		SCALE	APPROVED	
REV.	A	UNIT		
DRAWING NO:		INCH		